TURBO FRAME DIMENSIONS

EFR 6758-F(v) 250 - 500 HP Turbo




### **Key Turbo Features**

- · Gamma-Ti turbine wheel
- Dual ceramic ball bearing assembly with metal cage
- · Large internal wastegate
- V-Band Inlet Connection

## Not Included with Turbo Assemblies:

- Speed sensor
- Turbine outlet V-Band
- Turbine inlet gasket
- · Oil drain gasket or drain port fitting

#### COMPRESSOR MAP

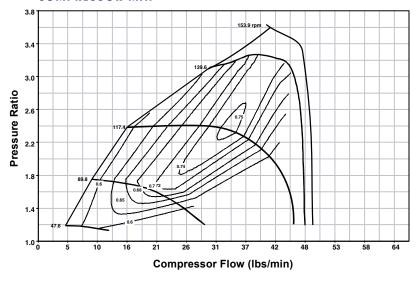

#### TURBINE HOUSING OPTIONS

Turbine Housing Part Number	A/R	Inlet Flange Shape	Housing Config	
11581008000	0.85	T25	Single Scroll WG	
11581008002	0.80	T4	Twin Scroll WG	
11581008003	0.85	V-Band	V-Band, Non WG	
11581009006	0.64	T25	Single Scroll WG	

# 50.8mm (2.00) OLD MOUNTAGE Oil inlet fitting -4 AN Male 92mm 63.5mm (3.62)(2.50)183.8mm 80.1mm (7.23)(3.15)Oil Drain Oil Drain 3/8 NPT capscrew holes M8-1.25 (38mm bolt spacing) 60mm (2.36) 76mm (2.99)

#### SUPER CORE CONFIGURATION

The following parts are not included as part of the super-core assembly: turbine housing, assembly clamp plate hardware, wastegate parts.

Turbo Part #	Turbo Frame Size	Super Core Part#	Comp. Wheel Outer Dia. (mm)	Comp. Wheel Inducer Dia.	Turbine Wheel Outer Dia.	Turbo A/R	Inlet Flange Config
11589880035	B1	11587105001	67	54	58	0.85	V-Band

