TURBO FRAME DIMENSIONS

EFR 9180-B

600 - 1000 HP Turbo




Key Turbo Features

- · Gamma-Ti turbine wheel
- Dual ceramic ball bearing assembly with metal cage
- · Stainless steel turbine housing
- · Large internal wastegate
- Standard T3 mounting flange

Not Included with Turbo Assemblies:

- Speed sensor
- Turbine outlet V-Band
- Turbine inlet gasket
- · Oil drain gasket or drain port fitting

COMPRESSOR MAP

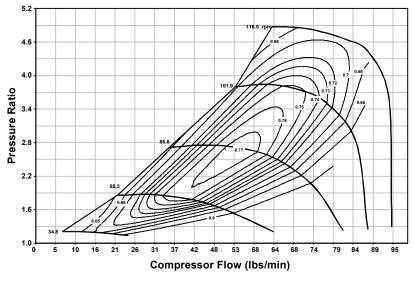

TURBINE HOUSING OPTIONS

| Turbine Housing Part Number | A/R | Inlet Flange Shape | Housing Config |
|--------------------------------|------|-----------------------|--------------------|
| 12801008002 | 0.83 | Т3 | Single Scroll WG |
| 12801019009 | 0.92 | T4 | Twin Scroll WG |
| 12801019001 | 1.05 | T4 | Twin Scroll Non-WG |
| 12801008006 | 1.45 | T4 | Twin Scroll Non-WG |

63.5mm (2.50)Oil inlet fitting - 4AN Male 101.6mm (4.00)92mm (3.62)174.4mm 117.8mm (6.86)(4.63)Oil Drain Hole Oil Drain 3/8 NPT capscrew holes M8X1.25 (38mm bolt spacing) 44.5mm (1.75)86mm (3.38)

SUPER CORE CONFIGURATION

The following parts are not included as part of the super-core assembly: turbine housing, assembly clamp plate hardware, wastegate parts.

| Turbo Part # | Turbo Frame Size | Super Core Part# | Comp. Wheel Outer Dia. (mm) | Comp. Wheel Inducer Dia. | Turbine Wheel Outer Dia. | Turbo A/R | Inlet Flange Config |
|-----------------|------------------------|------------------------|-----------------------------------|--------------------------------|--------------------------------|--------------|---------------------------|
| 179358 | B2 | 179356 | 91 | 68 | 80 | .83 | Т3 |

