EFR 7064-C

300 - 550 HP Turbo




Key Turbo Features

- · Gamma-Ti turbine wheel
- Dual ceramic ball bearing assembly with metal cage
- · Large internal wastegate
- Standard T4 mounting flange

Not Included with Turbo Assemblies:

- · Speed sensor
- Turbine outlet V-Band
- Turbine inlet gasket
- Oil drain gasket or drain port fitting

COMPRESSOR MAP

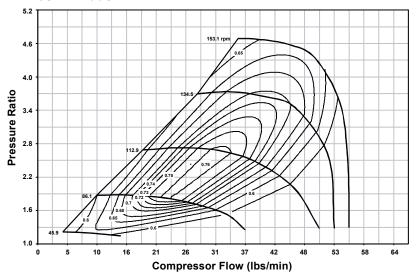

TURBINE HOUSING OPTIONS

Turbine Housing Part Number	A/R	Inlet Flange Shape	Housing Config		
12641008006	0.83	Т3	Single Scroll WG		
12641008007	0.92	T4	Twin Scroll WG		
12641019016	1.05	T4	Twin Scroll Non-WG		

TURBO FRAME DIMENSIONS 50.8mm (2.00) Oil inlet fitting - 4AN Male 88.9mm 92mm (3.50)(3.62)158.9mm 121.8mm (6.25)(4.79)Oil Drain Hole Oil Drain 3/8 NPT capscrew holes M8X1.25 (38mm bolt spacing) 69.9mm (2.75)82.6mm (3.25)

SUPER CORE CONFIGURATION

The following parts are not included as part of the super-core assembly: turbine housing, assembly clamp plate hardware, wastegate parts.

Turbo Part #	Turbo Frame Size	Super Core Part#	Comp. Wheel Outer Dia. (mm)	Comp. Wheel Inducer Dia.	Turbine Wheel Outer Dia.	Turbo A/R	Inlet Flange Config
179389	B2	179354	70	52	64	.92	T4

