EFR 7064-D

300 - 550 HP Turbo




Key Turbo Features

- · Gamma-Ti turbine wheel
- Dual ceramic ball bearing assembly with metal cage
- Standard T4 mounting flange

Not Included with Turbo Assemblies:

- Speed sensor
- Turbine outlet V-Band
- Turbine inlet gasket
- · Oil drain gasket or drain port fitting

COMPRESSOR MAP

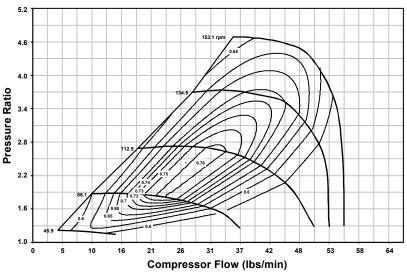

TURBINE HOUSING OPTIONS

Turbine Housing Part Number	A/R	Inlet Flange Shape	Housing Config
12641008006	0.83	Т3	Single Scroll WG
12641008007	0.92	T4	Twin Scroll WG
12641019016	1.05	T4	Twin Scroll Non WG

TURBO FRAME DIMENSIONS 50.8mm (2.00)Oil inlet fitting - 4AN Male 92mm 88.9mm (3.62)(3.50)98.6mm 142mm (5.60)(3.88)Oil Drain Hole Oil Drain 3/8 NPT capscrew holes M8X1.25 (38mm bolt spacing) 69.9mm (2.75)

SUPER CORE CONFIGURATION

The following parts are not included as part of the super-core assembly: turbine housing, assembly clamp plate hardware, wastegate parts.

82.6mm (3.25)

Turbo Part #	Turbo Frame Size	Super Core Part#	Comp. Wheel Outer Dia. (mm)	Comp. Wheel Inducer Dia.	Turbine Wheel Outer Dia.	Turbo A/R	Inlet Flange Config
179391	B2	179354	70	52	64	1.05	T4

